


COLD PERFORATION UNIT „B – SMART“

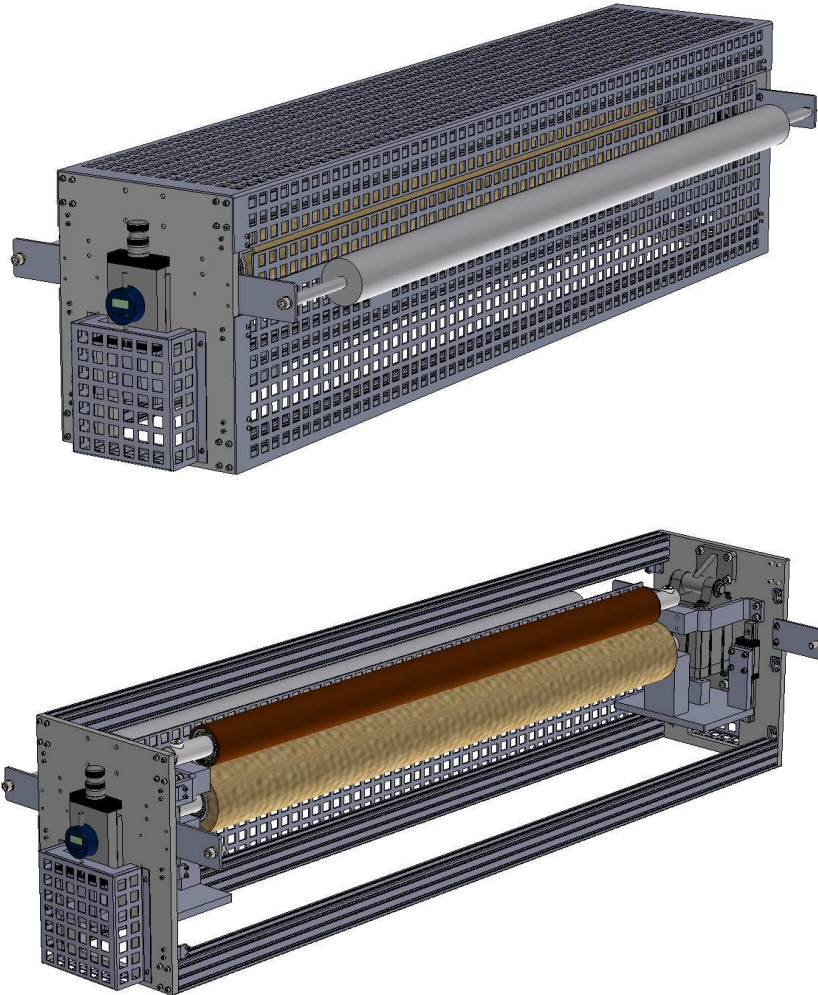

CHARACTERISTICS

- Solid and compact steel/aluminum frame design
- Non-driven perforation-roller core-Ø 80 mm
- Non-driven counter-roller outside-Ø 120 mm, made of brush, rubber or felt according to application
- Pneumatic engage/disengage device
- Manual penetration depth control with visualization on digital dial gauge
- Available in 3 standard widths (800, 1300, 1650) covering working width from 500 – 1'600 mm
- Perforation pattern 1 – 25 pins/cm² according to material to be perforated and expected forces
- Speed up to 250 m/min.

Options

- Air maintenance unit for emergency circle integration
- Manual pneumatic valve for perforation start/stop
- Electric pneumatic valve for line integration perforation start/stop
- Deflection rollers at material entrance / exit