



BURCKHARDT
OF SWITZERLAND





Cold Pin Perforating Unit
PAB-K

Cold Perforating Unit PAB-K

Machine type	Cold Pin Perforating Unit
Machine name	PAB-K
Working width	Up to 2000 mm
Perforating roller	Core Ø 110mm Perforating segments according to customer's specification Ø over pin tips: 130 – 160 mm Option: U-joint for perforating ring exchange without dismantling the perforating roller
Counter roller	Roller Ø 120 – 160 mm Rubber coated Option: (according to application) <ul style="list-style-type: none"> • Tampico fibre brush • Felt • Grooves
Line speed	Up to 300 m/min
Penetration adjustment	Manual thread with knurled screw
Working temperature	Up to 50°C (room temperature)
External dimension	Total length = working width + 300 mm (with drive + 922 mm) Height: 700 mm (approx.) Depth: 380 mm (approx.)
Additional options	<ul style="list-style-type: none"> • Drive system 2.2 kW, DC-motor, 50 Hz, 400 V • Electronic controls (SPS/Clamping box) • Electro-magnetic roller breaks • Can be installed in horizontal position • Special requests will be offered if ever possible!

Front page picture: Machine is customized with option 5 (driven take-off roller)

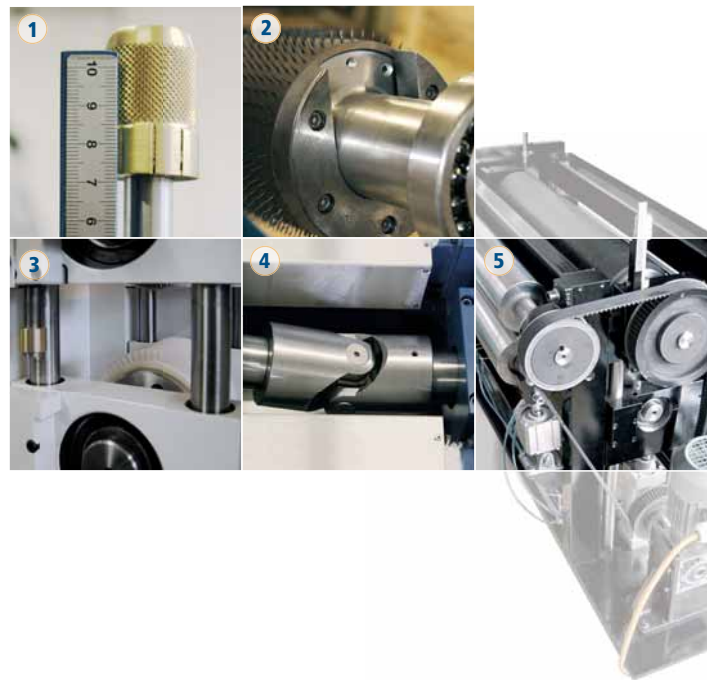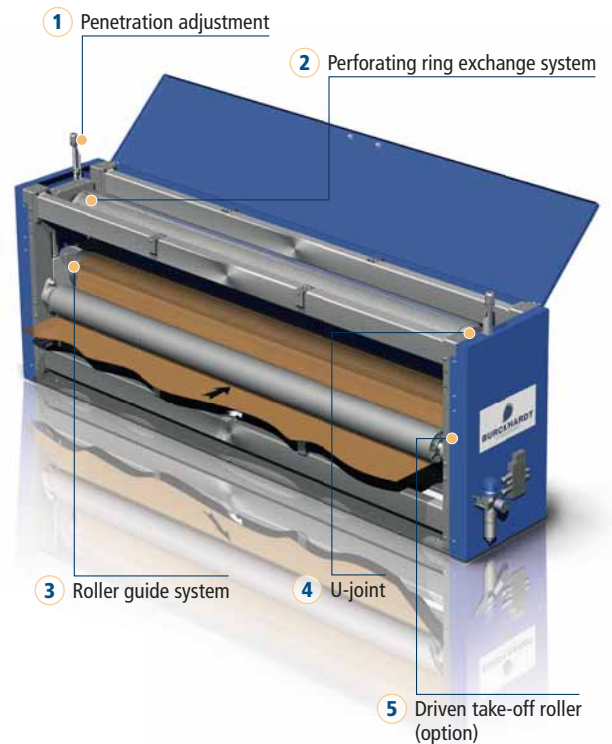

CHRISTOPH BURCKHARDT AG
Pfarrgasse 11, CH-4019 Basel
Switzerland
Tel +41 61 638 18 00
Fax +41 61 638 18 50
info@burckhardt.com
www.burckhardt.com

Please contact us for more detailed
information